

# LONCOIN I

# LONSEAL


The Loncoin series boasts a coin surface embossing that delivers a striking directional design — a decorative touch that provides style and enhanced traction. LONCOIN I is distinguished by a light texture around the coin shapes. It has been demonstrating its resilience in high-traffic interiors for decades.

## STANDARD SIZES (nominal)

**Overall thickness:** 0.100" (2.5 mm)  
**Wear layer thickness:** 0.031" (0.80 mm)  
**Roll Size:** 6' (1.8 m) wide x 60' (18.3 m)  
**Weight:** 0.8 lbs./sq. ft., 280 lbs./roll  
**Colors:** Three available

## GREEN FEATURES

- GreenMedic™: Formulated for microbial resistance
- GreenAir™: Formulated for low VOCs
- 20 - 40% post-industrial recycled content
  - Contributes towards LEED MR 4.1 and MR 4.2
- FloorScore® Indoor Air Quality Certified
  - Conforms to CA Specification 01350
- LEED Low Emitting Materials
  - Adhesives and Sealants: LEED IEQ Credit 4.1
  - Flooring Systems: LEED IEQ Credit 4.3

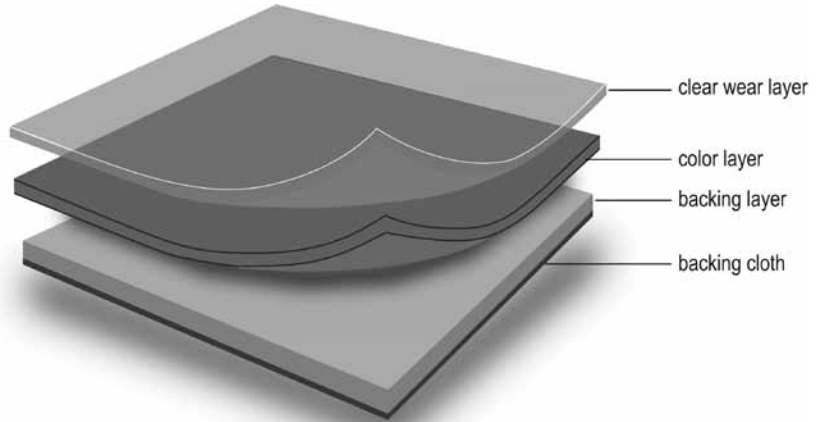

## 10-YEAR WARRANTY

Lonseal offers a 10-year limited warranty.

## TECHNICAL DATA

Sheet Vinyl Floor Covering with Backing, ASTM F1303.....	Type 1, Grade1, Class B
Flexibility, ASTM F137.....	Pass
Hardness, ASTM D2240.....	85
James Machine, SCOF, ASTM D2047.....	Neolite: 0.68; Neolite w/ Finish: 0.70
Abrasion Resistance, ASTM D3884.....	0.40%, 1,000 cycles
Static Load (max 0.005"), ASTM F970.....	850 psi
Short-term Indentation, ASTM F1914.....	0.009" residual indentation @ 75 lbs.
Castor Chair Test, ISO TR4918.....	25,000 cycles - Wear: 4.0, Color: 4.0, Change: 4.2
Dimensional Stability, ASTM F2199.....	0.17% loss
Heat Stability, ASTM F1514.....	Pass
Light Stability, ASTM F1515.....	Pass
Critical Radiant Flux, ASTM E648.....	Class 1 $\geq 0.45$ watts/cm <sup>2</sup>
Chemical Resistance, ASTM F925.....	No Change