


# LONFLOOR GALVANIZED with Topseal LONSEAL

LONFLOOR GALVANIZED with Topseal takes the granite look of Lonfloor Flecks in a simpler, more industrial direction. The subtle color choices offer warmth while the stone-like aesthetic has a polished, sophisticated appeal

**Topseal** is Lonseal's factory-applied urethane finish that protects the floor, reduces scuffing and simplifies routine maintenance. Topseal is applied in a 30-micron wear layer and extends the life of the flooring by protecting it from wear due to staining, soiling and scuffing.

## STANDARD SIZES (nominal)

**Overall thickness:** 0.080" (2.0 mm)  
**Wear layer thickness:** 0.031" (0.8 mm)  
**Roll size:** 6' (1.8 m) wide x 60' (18.3 m)  
**Weight:** 0.6 lbs./sq. ft., 220 lbs./roll  
**Colors:** Six available

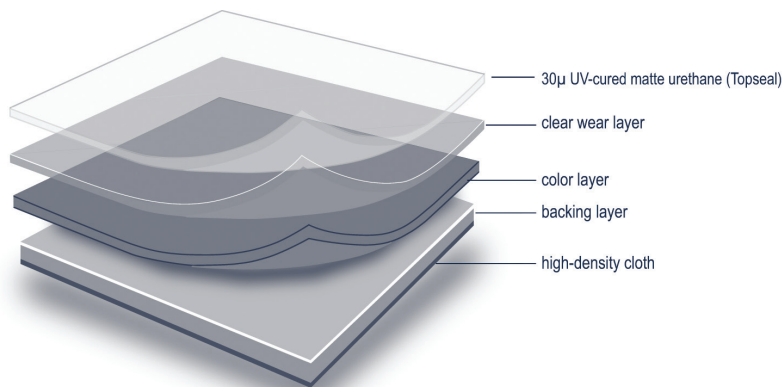

## GREEN FEATURES

- GreenMedic™: Formulated for microbial resistance
- GreenAir™: Formulated for low VOCs
- 20 - 40% post-industrial recycled content
  - Contributes towards LEED MR 4.1 and MR 4.2
- FloorScore® Indoor Air Quality Certified
  - Conforms to CA Specification 01350
- LEED Low Emitting Materials
  - Adhesives and Sealants: LEED IEQ Credit 4.1
  - Flooring Systems: LEED IEQ Credit 4.3

## 10-YEAR WARRANTY

Lonseal offers a 10-year limited warranty.

## TECHNICAL DATA

Sheet Vinyl Floor Covering with Backing, ASTM F1303.....	Type 1, Grade1, Class B
James Machine, SCOF, ASTM D2047.....	Neolite: 0.99
Hardness, ASTM D2240.....	92
Rolling Chair Test, ASTM D6962.....	5.0 @ 25,000 cycles
Critical Radiant Flux, ASTM E648.....	Class 1 ≥0.45 watts/cm <sup>2</sup>
Flexibility, ASTM F137.....	Pass
Abrasion Resistance, ASTM F510.....	0.27%, 1,000 cycles
Puncture Resistance, ASTM F924.....	41.4 lbs.
Chemical Resistance, ASTM F925.....	No Change
Static Load, ASTM F970.....	0.002" @ 250 lbs.
Static Load (max 0.005"), ASTM F970*.....	550 psi
In-Service Exposure, ASTM F1037.....	Excellent
Resistance to Impact, ASTM F1265.....	Pass
Heat Stability, ASTM F1514.....	Pass
Light Stability, ASTM F1515.....	Pass
Short-term Indentation, ASTM F1914.....	0.006" residual indentation @ 75 lbs.
Dimensional Stability, ASTM F2199.....	0.13% loss
Rolling Load, ASTM F2753.....	Hil-Rom Wheel, 300 lbs., 500 cycles

\*When test parameters exceed the Precision and Bias of the standard, accuracy and consistency of the results will vary. This information is provided as a reference only, and may not be indicative of the materials actual performance.



CERTIFIED BY  
SCS Global Services



Updated: 12.22.2014