

LONFLOOR VISTA is a high-performance heterogeneous sheet vinyl flooring solution available in a chic range of colorways that will add interest and sophistication to any space.


*Due to the light color of #641, additional maintenance procedures are necessary to ensure a long lasting installation.

STANDARD SIZES (nominal)

- Overall thickness:** 0.080" (2.0 mm)
- Wear layer thickness:** 0.031" (0.8 mm)
- Roll size:** 6' (1.8 m) wide x 60' (18.3 m)
- Weight:** 0.7 lbs./sq. ft., 250 lbs./roll
- Colors:** Eight available

GREEN FEATURES

- GreenMedic™: Formulated for microbial resistance
- GreenAir™: Formulated for low VOCs
- 20 - 35% post-industrial recycled content
 - Contributes towards LEED MR 4.1 and MR 4.2
- FloorScore® Indoor Air Quality Certified
 - Conforms to CA Specification 01350
- LEED Low Emitting Materials
 - Adhesives and Sealants: LEED IEQ Credit 4.1
 - Flooring Systems: LEED IEQ Credit 4.3

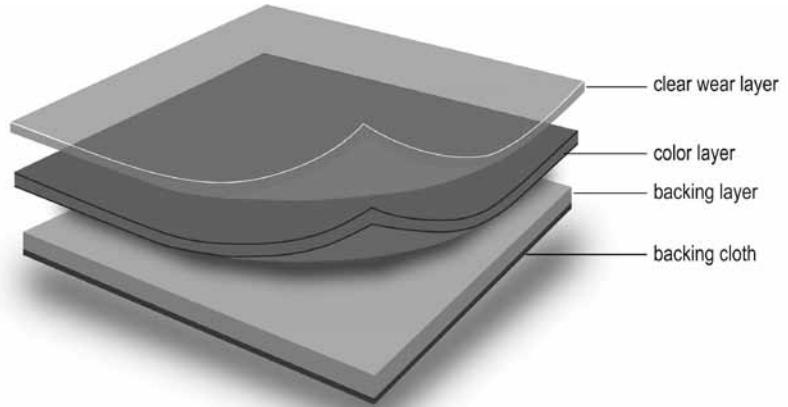

10-YEAR WARRANTY

Lonseal offers a 10-year limited warranty.

TECHNICAL DATA

Sheet Vinyl Floor Covering with Backing, ASTM F1303	Type 1, Grade1, Class B
Flexibility, ASTM F137	Pass
Hardness, ASTM D2240	90
James Machine, SCOF, ASTM D2047	Neolite: 0.76; Neolite w/ Finish: 0.76
Abrasion Resistance, ASTM D3884060%, 1,000 cycles
Static Load (max 0.005"), ASTM F970	1,100 psi
Short-term Indentation, ASTM F1914	0.009" residual indentation @ 75 lbs.
Castor Chair Test, ISO TR4918	25,000 cycles - Wear: 4.5, Color: 4.5, Change: 4.7
Dimensional Stability, ASTM F2199	0.22% loss
Heat Stability, ASTM F1514	Pass
Light Stability, ASTM F1515	Pass
Critical Radiant Flux, ASTM E648	Class 1 ≥ 0.45 watts/cm ²
Chemical Resistance, ASTM F925	Slight Surface Dulling: Gasoline



by SCS Certified



LOW VOC PRODUCTS BY LONSEAL INC.



High Performance, Anti-Microbial products by Lonseal Inc.



Updated: 04.14.14