

# LONPOINT MOONWALK

# LONSEAL


LONPOINT MOONWALK is a heterogeneous resilient sheet vinyl flooring solution that boasts a unique high-performance coin-stamp texture that provides both style and surface grip. It is available in a selection of traffic-stopping primary colors as well as an array of elegant grays.

## STANDARD SIZES (nominal)

**Overall thickness:** 0.08" (2.00 mm)  
**Wear layer thickness:** 0.031" (0.8 mm)  
**Roll size:** 6' (1.8 m) wide x 60' (18.3 m)  
**Weight:** 0.7 lbs./sq. ft., 240 lbs./roll  
**Colors:** Nine available

## GREEN FEATURES

- GreenMedic™: Formulated for microbial resistance
- GreenAir™: Formulated for low VOCs
- 20 - 40% post-industrial recycled content
  - Contributes towards LEED MR 4.1 and MR 4.2
- FloorScore® Indoor Air Quality Certified
  - Conforms to CA Specification 01350
- LEED Low Emitting Materials
  - Adhesives and Sealants: LEED IEQ Credit 4.1
  - Flooring Systems: LEED IEQ Credit 4.3

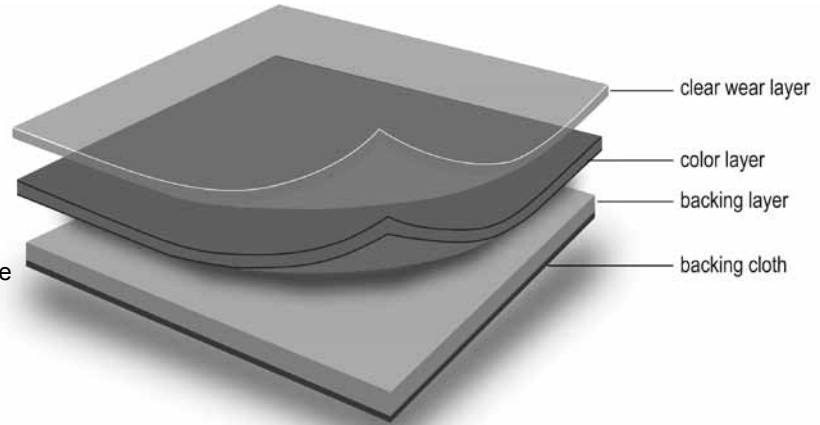

## 10-YEAR WARRANTY

Lonseal offers a 10-year limited warranty.

## TECHNICAL DATA

Sheet Vinyl Floor Covering with Backing, ASTM F1303.....	Type 1, Grade1, Class B
Flexibility, ASTM F137.....	Pass
Hardness, ASTM D2240.....	95
James Machine, SCOF, ASTM D2047.....	Neolite: 0.75; Neolite w/ Finish: 0.76
Abrasion Resistance, ASTM D3884.....	0.73%, 1,000 cycles
Static Load (max 0.005"), ASTM F970.....	700 psi
Short-term Indentation, ASTM F1914.....	0.015" residual indentation @ 75 lbs.
Castor Chair Test, ISO TR4918.....	25,000 cycles - Wear: 4.0, Color: 4.0, Change: 4.3
Dimensional Stability, ASTM F2199.....	0.22% loss
Heat Stability, ASTM F1514.....	Pass
Light Stability, ASTM F1515.....	Pass
Critical Radiant Flux, ASTM E648.....	Class 1 $\geq 0.45$ watts/cm <sup>2</sup>
Chemical Resistance, ASTM F925.....	No Change



by SCS Certified



Updated: 04.14.14