

LONSEAL[®]

FLOORING

LONSPECK[®] Topseal

High Performance with a Timeless Design

The speckled surface of LONSPECK TOPSEAL easily hides grit and scuffing, while the sanitary seaming contributes to a hygienic environment. The nine therapeutic colors available make Lonspeck an exceptionally flexible option in commercial spaces, including healthcare, offices, education facilities and showrooms. Topseal is a factory-applied urethane finish that protects the floor, reduces scuffing and simplifies routine maintenance. Topseal wear layer extends the life of the flooring by protecting it from wear due to staining, soiling and scuffing.

FEATURES *(data shown is nominal):*

Roll Width: 6 ft. (1.8 m)
Roll Length: 60 ft. (18.3 m)
Overall Thickness: 0.080 in. (2.0 mm)
Wear Layer Thickness: 0.028 in. (0.7 mm)
Weight: 0.6 lbs./sq. ft. (3.1 kg/m²)

ASTM F1303 CLASSIFICATION:

Type I, Grade 1, Class B, Commercial Use

MEETS FMVSS 302:

CFR 49 §571.302 Flammability of Interior Materials

CERTIFIED:

FloorScore[®]

EXCLUSIVE LONSEAL FORMULATIONS:

TOPSEAL, GreenAir[®] & GreenMedic[®]

LEEDv4/4.1 CONTRIBUTION B & C Interiors:

Environmental Product Declarations Option 1
Sourcing of Raw Materials Option 2
Low-Emitting Materials






SX111
Twilight Zone



SX112
Magnetic Gray



SX113
Rocky Beach

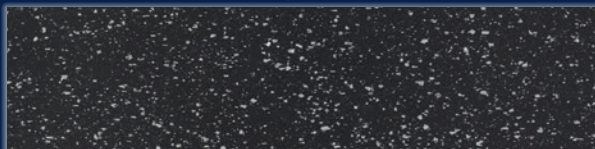

SX114
Tamarind




SX116
White Pepper




SX118
Vanilla Bean



SX115
Sandstorm



SX117
Hale Navy



SX119
Pigeon Gray

