
OPTION A Front Back

Maximum Imprint Area

2.25" Width x 1.5" Height

Manufactured by 3M for ____Your Company Name



INSTRUCTIONS

- **1.** Unwrap 12" (30 cm) of the band and wrap adhesive side around your wrist.
- Unroll rest of band and remove liner from copper tape.
- **3.** Attach the copper tape to electrical ground or the metal frame of equipment you are servicing.

CAUTION: This product is not recommended for use on equipment with operating voltage exceeding 250 volts. The disposable wrist strap is for static control. It will not reduce or increase your risk of receiving electric shock when using or working on electrical equipment. Follow the same precautions you would use without the wrist strap, including:

- Make certain that equipment having a grounding type plug is properly grounded.
- 2. Make certain that you are not in contact with grounded objects other than through the disposable wrist strap.

DO NOT INSTALL OR UNPACK COMPONENTS WITHOUT USING THE ENCLOSED WRIST STRAP.

Failure to use it properly can result in static electricity damage.

WARNING: A current limiting resistance is fabricated into the plastic ribbon below the wrist band. If it appears damaged, cut off or missing, discard wrist strap immediately and replace.

IMPORTANT NOTICE: Before utilizing the product, the user should determine the suitability of the product for its intended use. 3M expressly disclaims the implied warranties of merchantability or fitness for a particular purpose. In no case shall 3M be liable under any legal theory, including but not limited to negligence, contract or strict liability, for any direct, indirect, special, incidental or consequential damages resulting from product use.

3M Electronic Handling & Protection DivisionAustin, TX 78726-9000 Made in USA 34-7045-2178-9

Requirements/Lead-Time:

Minimum Release Quantity: 5,000

Custom Printing: 1 Color, Black


Typical Lead-Time: Initial order: 4 weeks to shipment upon receipt of artwork

Repeat order: 2 weeks to shipment

OPTION B Front Back

3M 2209

Disposable Wrist Strap

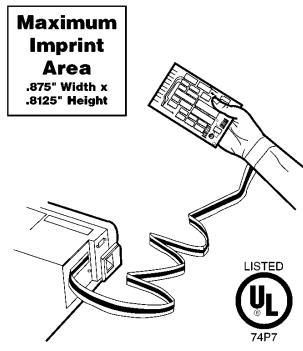

INSTRUCTIONS

- **1.** Unwrap 12" (30 cm) of the band and wrap adhesive side around your wrist.
- **2.** Unroll rest of band and remove liner from copper tape.
- **3.** Attach the copper tape to electrical ground or the metal frame of equipment you are servicing.

CAUTION: This product is not recommended for use on equipment with operating voltage exceeding 250 volts. The disposable wrist strap is for static control. It will not reduce or increase your risk of receiving electric shock when using or working on electrical equipment. Follow the same precautions you would use without the wrist strap, including:

- Make certain that equipment having a grounding type plug is properly grounded.
- 2. Make certain that you are not in contact with grounded objects other than through the disposable wrist strap.

DO NOT INSTALL OR UNPACK COMPONENTS WITHOUT USING THE ENCLOSED WRIST STRAP. Failure to use it properly can result in static electricity damage.

WARNING: A current limiting resistance is fabricated into the plastic ribbon below the wrist band. If it appears damaged, cut off or missing, discard wrist strap immediately and replace.

IMPORTANT NOTICE: Before utilizing the product, the user should determine the suitability of the product for its intended use. 3M expressly disclaims the implied warranties of merchantability or fitness for a particular purpose. In no case shall 3M be liable under any legal theory, including but not limited to negligence, contract or strict liability, for any direct, indirect, special, incidental or consequential damages resulting from product use.

3M Electronic Handling & Protection DivisionAustin, TX 78726-9000 Made in USA
34-7045-2180-5

Requirements/Lead-Time:

Minimum Release Quantity: 5,000

Custom Printing: 1 Color, Black

Typical Lead-Time: Initial order: 4 weeks to shipment upon receipt of artwork

Repeat order: 2 weeks to shipment

4/1/99

Technical Details:

We are currently equipped to utilize electronic files from either Macintosh or PC, camera-ready artwork that you provide or provide you with the option of letting our artwork supplier create an acceptable graphic for you. Please review and complete this form and include with your requests. Upon receipt of the request, you will be notified as to when a sample (proof) will be made available for your approval. At that time, any cost associated with the development of your artwork will be made available (this is a one-time set-up charge). Please review this form which outlines all the necessary artwork requirements and feel free to contact the 3M Artwork Control Center with any further questions.

* All artwork imprints may shift 1/8" vertically or horizontally.

(Please print a Company:	and fill out o	completely)		
Address:				
Contact:				
Phone #:				
Fax # :				

Your Artwork Media Options:

• Electronic Artwork:

Preferred Software Applications:

Adobe Illustrator, Quark Express, Aldus Freehand and Adobe Pagemaker.

File Extension: .EPS
File Resolution: 300 dpi

• Printed Camera-Ready:

Note: Camera-ready artwork will be scanned-in for use with our imprinting system. This artwork option will not provide the best print quality on your final product.

Artwork can be sized and/or created by our Artwork Control Center for a nominal fee. Prices will range from \$250. USD for artwork provided to the Center electronically to size, to \$400 for artwork that must be recreated completely. Call as noted below for details.

Where to Send Your Artwork:

- 1. Provide the artwork following media options listed above (if you are providing an electronic file, please include a hard copy for reference within your shipment).
- 2. Send to: 3M Artwork Control Center

Attn: 3M Account Rep.

5910 Courtyard Drive, Suite 150

Austin, TX, 78731

Phone: 1-800-230-2332 Fax: 1-512-345-6227

3. Make sure the address and contact information you provided above is the correct information outlining where to send your final proof for approval.